


Gyroled M130

The Gyroled M130 Class 2 is a new LED beacon with 13 flash patterns. Available in several colours.
Article number : 28701

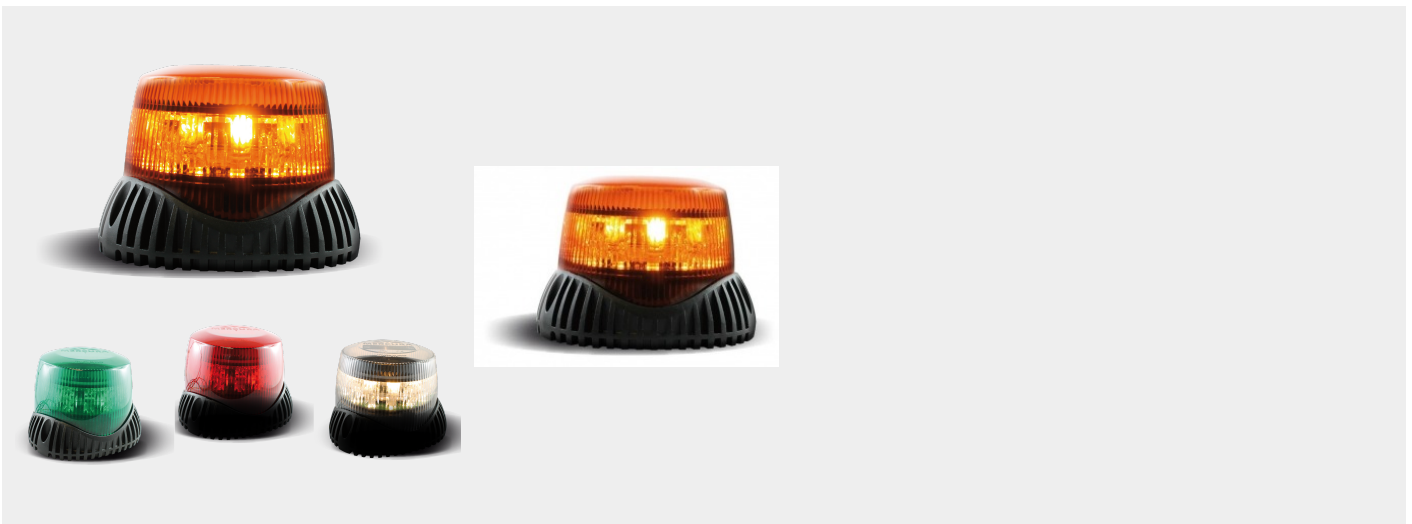

The Gyroled M130 is a new LED beacon with several new features. This powerful light can be used both in rotating and flashing mode, with a single, double, or triple flash, on 180 or 360 degrees.

Advantages:

- LED beacon R65 and EMC approved
- High brightness R65 Class 2
- 13 flash patterns available
- Cruise function
- Polycarbonate dome
- One central LED on Gyroled top for aerial identification

Product's codes:

| Mounting | Colour | Flashing Mode | Code |
|---|---------|------------------------|-------|
| ISO | Amber | To be programmed | 28701 |
| | Green | | 28704 |
| | Red | | 28703 |
| | Crystal | | 28702 |
| Magnetic CLP | Amber | Rotating | 29775 |
| | Amber | Flash | 29776 |
| | Amber | Modifiable by the user | 29620 |
| Options M130 options for roof systems | | | |
| M130 amber kit (2 x M130 with mountings - for roof systems from 2012) | | | 30911 |

| | |
|------------------------------|--|
| Lens | Polycarbonate |
| Colour LEDs | White |
| Colour lens | Amber |
| Flash Patterns | 13 flash patterns |
| Mounting | Magnetic, ISO-base |
| Voltage | 12V, 24V |
| Consumption | 12V : 1,8A 24V : 0,9A |
| Diameter | 184,5 mm |
| Weight | ISO : 1.274 kg Magnetic : 2.221 kg |
| Height | 123 mm |
| Operating temperature | -40°C - +85°C |
| Enclosure rating | IP 45 IK 06 |
| Approval | ECE R65 II, ECE R10, EMC, ICAO Annex 14 |



Beacon complying with the requirements of Annex 14 (Convention on International Civil Aviation of the ICAO Regulation for Vehicles and Mobile Obstructions Type C) and EASA (Annex to ED Decision 2014/013 / R - Certification Specifications (CS) And Guidance Material (GM) for Aerodromes Design - CS-ADR-DSN)