


## Gyroled M80 Class 1

13 flashing patterns, modifiable in few seconds!

Article number : 30577

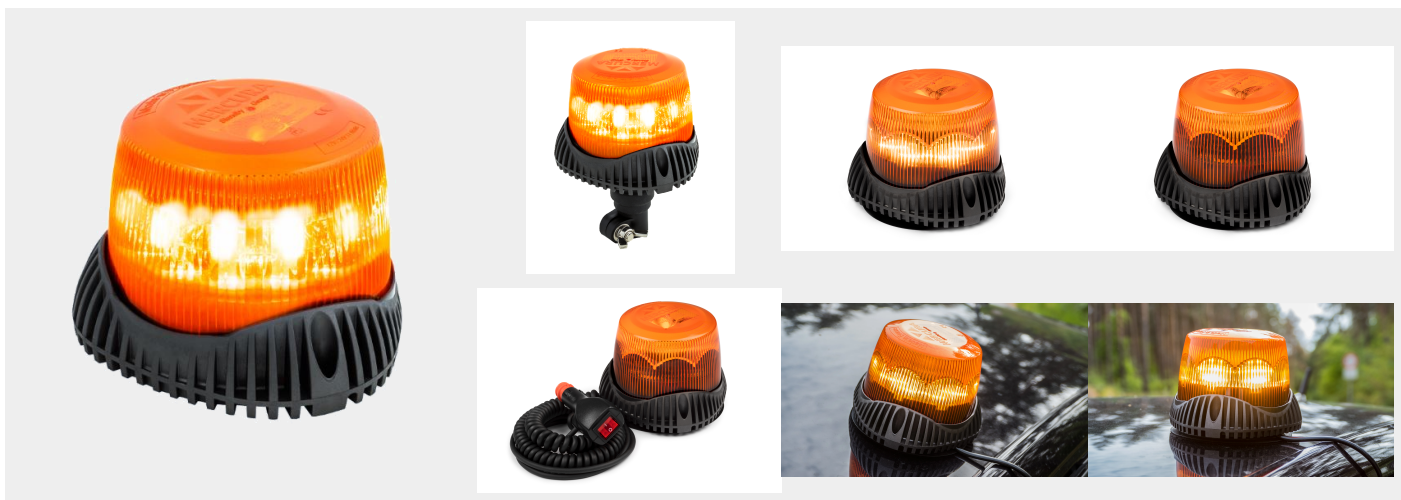

### Advantages:

- LED beacon, R65 and EMC approved
- Sold in batch - economical price
- Intended for first assembly
- High brightness R65 Class 1 approved
- 13 flash patterns available programmable by the user (by default, product delivered in rotating mode)
- Plastic base for better heat dissipation

### Technical specifications

- 13 flash patterns
- Polycarbonate dome
- Power supply: 11 W maximum
- Protected against polarity reversals
- Guarantee period: 3 years

### Approvals

**PHOTOMETRY:** R65 Class 1 approval **PROTECTION RATINGS:** Impermeability: IP45 - Protection from mechanical impacts: IK08 **EMC:** « E » Marking Regulation R10 N° E2 10R05 16242 CISPR25 (2008): class 4 or 5 radiated

Mounting	Code
ISO	30577
PIPE MOUNT	30582
Magnetic with cigare lighter plug	31653

For more information, please consult the "documentation" tab below and find our product approvals [here](#).

<b>Lens</b>	Polycarbonate
<b>Colour LEDs</b>	White
<b>Colour lens</b>	Amber
<b>No. of LEDs</b>	8
<b>Flash Patterns</b>	13 flash patterns
<b>Mounting</b>	Surface Mount, Pedestal, Magnetic, ISO-base
<b>Voltage</b>	10-30V
<b>Consumption</b>	900mA depending on the flash pattern
<b>Diameter</b>	ISO: 134 mm PIPE MOUNT: 134 mm MAGNETIC: 134 mm
<b>Weight</b>	ISO: 0.450 kg PIPE MOUNT: 0.585 kg MAGNETIC: 0.750 kg
<b>Length</b>	For the magnetic version: spiral cord, minimum length 50cm, maximum 3m
<b>Height</b>	ISO: 96 mm PIPE MOUNT: 176 mm MAGNETIC: 105 mm
<b>Operating temperature</b>	-40°C to +85°C
<b>Enclosure rating</b>	IP 45 IK 08
<b>Approval</b>	ECE R65 I, ECE R10
<b>Origin of product</b>	Europe
<b>Guaranty</b>	3 years

